

# STL362DQ



## Product Family

**Commercial width** 60 cm

**Commercial height** 82 cm

**Installation** Fully-integrated built-in

**Kitchen panel** Not supplied

**Nº baskets** 3, Flexi

**Motor** Inverter 2.0

**EAN code** 8017709337353



## Programs



**N. of programmes** 7+1

**Mix**

**Washing temperatures** 50, 60 °C

**Self clean**

Yes

**Soak** Yes

**Intense 60°**

Yes

**Full express - 60 minutes** Yes

**Mix 60°**

Yes

**Express 50°** Yes

**Auto 50°-60°**

Yes

**ECO** Yes

## Options



**Delay timer option** Up to 24 hours

**Crystal option**

Yes

**Extreme option** Yes

## Baskets

**Basket colour** Grey

**Largest loadable dish in upper basket** 19,0 cm

**Basket components colour** Grey

**Lower Basket** With 2 foldable racks

**Handle** In plastic on upper and lower basket

**Largest loadable dish in lower basket** 31.0 cm

**Upper Basket** With 1 foldable rack

**Colour Inner Components** Blue

**Height adjustment of the upper basket** On two levels (4 cm)

## Technical Features



Width (mm)	596 mm	Water supply	Single; cold/hot water max. 60°C - energysave with hot water up to 35%
Depth (mm)	550 mm	Max water hardness	90°fH; 50°dH
Display type	LED display (3 digit)	Drying system	Natural condenser drying, with Dry Assist + automatic door opening system at the end of the cycle
Product Height (mm)	818 mm	Steam protection	In plastic
Controls	Electronic	Tub material	Stainless steel
Display	Delayed start, Programme time indicator, Time to end indication	Filter	Stainless steel
Programme graphics	Symbols	Concealed heating element	Yes
On/off indicator	Yes	Hinges	Self balancing, Sliding, FLEXIFIT
Salt light indicator	Light	Min. and max. frontal panel weight	2,5 - 10 kg
Rinse aid indicator	Light	Min. and max plinth height	40 - 175 mm
End of cycle indicator	On display, with acoustic signal	Adjustable feet	8 cm, from 820 to 900 mm
Washing system	Standard	Additional gaskets	Yes
Third spray arm	Single	Back cover	Yes
Water softener	With electronic setting	Depth of dishwasher with open door (mm)	1230 mm
Turbidity sensor	Yes	Back feet adjustable from front	Yes
Aquastest			
Flood protection system	Total Acquastop		


## Performance / Energy Label - Reg. 2019



Energy Efficiency Class	D	Programme duration	4:00 h:min
Energy consumption [per 100 cycles, based on the eco programme]	85 kWh	Airborne acoustical noise emissions	46 dB(A) re 1 pW
Rated capacity (ps)	14	Airborne acoustical noise emission class	C
Water consumption [per cycle]	10.5 litres	Energy efficiency Index (EEI)	49.9

## Electrical Connection

Connected power	1800 W	Type of connection	Single-phase
Current	10 A	Power supply cable length	140 cm
Voltage	220-240 V	Plug	(F;E) Schuko
Frequency (Hz)	50 Hz		

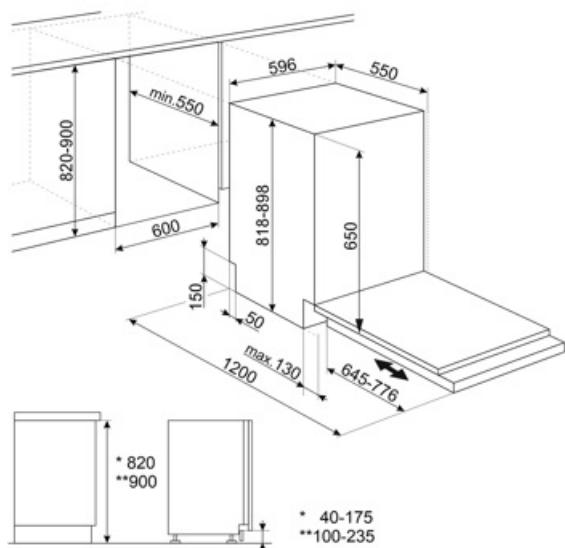

## Symbols glossary



The Aquatest sensor is an electronic sensor that measures the degree of water transparency at the end of the initial soaking phase. Based on the values measured, the sensor sets the most suitable programme, thus obtaining the best washing results with the minimum amount of water.



82 cm high



Option which improves the washing results of the selected programme. It increases the wash temperature and duration.



Noise Level: Excellent insulation and special devices keep noise to a minimum.



A quick programme suitable for washing a load with fresh and light soil.



Dishwasher cleaning cycle. The cycle should be started with the machine empty, without dishes. It is recommended to run the program every 2-3 months, using special dishwasher detergents.



14 place settings: Number of place settings.



System WaterSave ensures the best washing results with minimal water consumption depending on the model of dishwasher.



This option provides special care for a delicate load. It prevents rapid changes in the wash temperature of the selected programme and reduces it to 4



Energy efficiency class D



Delay Timer: Option to postpone the start of the desired programme by up to 24 hours in order to programme the dishwasher to run at the desired time.



The FlexiFit hinges allow the kitchen panel to slide over the dishwasher door, allowing a minimum kitchen plinth height of 5 cm.



Eco: Eco, this economic wash programme uses a low amount of water and energy in order to provide the most environmentally friendly cleaning option.



Quick wash cycle for normally soiled mixed loads such as dishes and pans, even with dried-on residues. Dishes are washed and dried in 60 minutes.



Soak programme: The soak programme provides a rinse to prevent dirt from drying.



Total AcquaStop: In addition to the partial AcquaStop protection present in all Smeg dishwashers, some models have an electronic device fitted to the water intake hose, which monitors water levels in the machine, detects leaks in the hose and switches off the water supply immediately when necessary.



Wash cycle for normally soiled mixed loads such as dishes and pans, even with dried-on residues. When this program is selected, the dishwasher recognises the type of dirt and automatically adjusts the washing parameters as appropriate.



Programme suitable for washing and drying heavily soiled items with encrusted residues.



Programme suitable for washing and drying normally soiled items.



The work aimed at continuous improvement has allowed the creation of the second generation of the Inverter motor 2.0, characterised by greater efficiency and durability over time, which allows very high performance and a lower energy consumption and noise level.

