

SI4642D



Product Family

| | |
|---------------|------------------------------------|
| Built-in type | Ultra-low profile or Fully Flushed |
| Dimensions | 60 cm |
| Power supply | Electric |
| Type | Induction |
| EAN code | 8017709287092 |



Aesthetics



Aesthetic

| | |
|-------------------------|----------------|
| Colour | Universale |
| Finishing | Black |
| Material | Glass |
| Glass type | Glass |
| Glass edge | Ceramic |
| Type of control setting | Straight edge |
| Slider | Compact Slider |
| LED colours | Yes |
| Control knob position | Red |
| Logo | Front |
| Serigraphy colour | Silk screen |
| | Grey |

Program / Functions



| | |
|-----------------------------------|------------------------|
| No. of induction cook zones | 4 |
| Time-setting options | Spegnimento automatico |
| No. of cooking zones with booster | 4 |
| Main on/off switch | Yes |
| Power levels | 9 |
| Total no. of cook zones | 4 |

Options



| | | | |
|-------------------------------------|--------------------|---------------------------------------|-------------------------|
| Worktop Cut-Out | 478-482x555-560 mm | Residual time indicator | Yes |
| Keep warm automatic function | Yes | Limited Power Consumption Mode | Si Advance |
| End cooking timer | 1 | Limited Power | 2400, 2800, 3500, 4000, |
| Pause option | Yes | Consumption Mode in W | 4500, 5000, 5500, 6000, |
| Minute minder | 1 | | 7400 W |
| End of cooking alarm | Yes | Control Lock / Child Safety | Yes |
| | | Rapid level selection | Yes |

Technical Features



Front-left - Induction - Single - 2.30 kW - Booster 3.00 kW - Ø 21.0 cm

Rear-left - Induction - Single - 1.85 kW - Booster 2.10 kW - Ø 16.0 cm


Rear-right - Induction - Single - 2.30 kW - Booster 3.00 kW - Ø 21.0 cm

Front-right - Induction - Single - 1.85 kW - Booster 2.10 kW - Ø 16.0 cm

| | | | |
|--|----------------|---|-----|
| Automatic setting according to pan dimension | Yes | Automatic switch off when overheated | Yes |
| pan detection | Yes, min. 7 cm | Residual heat indicator | Yes |
| Permanent Automatic Pot Detection with indication of the relative control | Yes | Protection against accidental start up | Yes |
| Minimum pan diameter indication | Yes | | |

Electrical Connection

| | | | |
|---|-------------------|---|-----------------------------|
| Electrical connection rating (W) | 7400 W | Additional connection modalities | Yes, Double and Three Phase |
| Current | 33 A | Frequency (Hz) | 50/60 Hz |
| Voltage (V) | 220-240 V | Power supply cable length | 120 cm |
| Voltage 2 (V) | 380-415 V | Terminal box | 6 poles |
| Type of electric cable installed | Yes, Single phase | Plug | Not present |

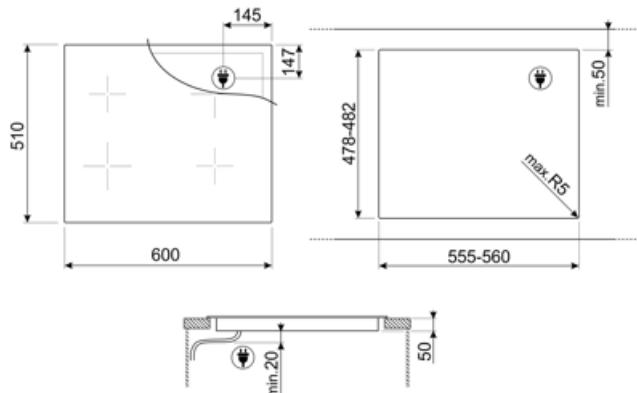

Compatible Accessories



SCRP

Non-scratch hob scraper - suitable for induction and ceramic hobs

Symbols glossary

| | | | |
|--|--|---|---|
|  | Permanent auto pot detection |  | Power booster: option allows the zone to work at full power when very intense cooking is necessary. |
|  | Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed. |  | Compact Slider intuitive and easy to use |
|  | The slider control panel allows you to adjust the power simply by passing your finger across the touch device. |  | CUT_OUT_STANDARD_72dpi |
|  | This function allows you to keep cooked food warm without burner it |  | Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit. |
|  | Induction: The work of these hobs is based on the principle of electromagnetic induction. The heat is generated directly in the bottom of the pan during its contact with the hob. |  | All cooking zones can be reduced to the minimum power level, so the hob can be left unattended for a short period without food overcooking or burning. Then just press again this function, the previously set power levels can be reactivated. |
|  | Quick selection, with one touch cooking begins at the highest level, then automatically reduces after time. Ideal for dishes that require quick boiling and then continued cooking without constant control (eg beef broth). |  | Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 °C, the indicator goes out. |
|  | Time elapsed: shows how long the cooking zone has been in use. |  | Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time. |
|  | Min diameter pot detection of 7 cm |  | Possibility to set the maximum power absorbtion of the hob |